

PRACTICAL IPV6 DEPLOYMENT FOR THE MASS MARKET

Kristoffer Larsen
Network Development Engineer
kri@telia.net



THE HISTORY OF MASS MARKET IPV6 WITHIN TELIA COMPANY

- On fixed access Telia Company launched an Opt-in IPv6 service back in 2011 for the “World IPv6 Day”
 - Based on 6RD (Rapid Deployment) and anycast to border relays
 - Allowing customers to enable IPv6 in the residential gateway configuration
 - Using newly deployed IPv6 DNS resolvers
- Between “World IPv6 Day” and “World IPv6 Launch” we participated in Google's IPv6 DNS activation to attract traffic
- Statistics show that very few customers actually enable IPv6



FIXED ACCESS REDESIGN MOTIVATION

- Old service design
 - Based on multiple PVCs/VLANs per Customer
 - Dragged along since the early days of DSLAMs for ATM QoS
 - Developed before Smartphones and Wi-Fi home routers became a commodity
 - Initially used with a multiport bridge with dedicated service ports
 - Multiple IPv4 addresses per customer
 - Internet
 - IPTV
 - Management
 - VoIP
- Access node types/models have increased over the years
 - Service development time has increased simultaneously
- Desire to Enable Native IPv6
 - Even on older not IPv6 capable access platforms



NEW DESIGN

- Each customer uses only one IPv4 address for all services
- Extensive use of 802.1q QinQ
 - Each customer has their own VLAN towards the BNG
- Moves most intelligence/features to a BNG
 - By disabling most of the security features in the access node
 - The access node will still do IGMP snooping with MVR (Multicast VLAN registration), meaning only multicast via IPv4



ADDRESS ASSIGNMENTS

- Based on DHCPv6 for both WAN link and prefix delegation
- Each access gets
 - /56 via DHCPv6 prefix delegation
 - /64 via DHCPv6 for WAN link
- Each BNG provides addresses from pools
 - /40 for prefix delegation
 - /48 for WAN links
- Leases are kept for 30 days after the last renew
 - Giving more or less a static prefix for the customer



SECURITY CONSIDERATIONS

- Most customers rely on their internal LAN not being accessible from the outside world
- CPE does provide a IPv6 statefull firewall
- Unicast Reverse Path Forwarding native to the BNG
- Update Abuse logging to support IPv6
- DDOS platform updated to support IPv6



RESIDENTIAL GATEWAY (RGW)

- Most of our RGW models have software based on OpenWRT and have fairly good IPv6 support
- IPv6 sessions are forwarded in the hardware
- Incoming connection requests
 - Currently blocked by default, as recommended in RFC6092
 - No option to open in current software versions, later software versions will allow static firewall entries
 - Considering Port Control Protocol (PCP)
 - Something like draft-v6ops-vyncke-balanced-ipv6-security will be available in later software versions
- Remote management enabled via IPv6 but not used



QoS

- CPE can prioritize upstream for neighbor discovery and DHCPv6
- On older access platforms there is no way to classify upstream IPv6 traffic
 - A problem might arise where a heavy loaded upstream interface between the access node and the BNG breaks DHCPv6 or neighbor discovery (ND), we consider this a small risk
 - No IPv6 for TV or VoIP
- Downstream traffic is marked in the BNG and follows MPLS CoS or 802.1p



BNG SCALING

- Caution is advised when doing calculations on how many subscribers a BNG can terminate
- Different vendors calculate subscribers differently
 - Some count each IPv4, IPv6 WAN and IPv6 PD session as a resource
 - Some can share resources between IPv4 and IPv6 resources and count them as one



CUSTOMER MIGRATION

- During a service window, customers are moved to a new BNG
- The RGW calls home via TR-069
- The TR-069 server notices that the RGW needs a new configuration
- A new configuration is pushed
 - Disabling 6RD
 - Enabling native IPv6
 - Enabling IPv6 on the LAN side



PROBLEMS FROM PILOT IN AS3308


- Overall we have had only a few minor issues
- We did not have any customer complaints after several months of a pilot with 25k customers
- But after reaching apprx 50k we discovered an error in the Akamai DNS implementation that directed our customers to a remote cache a few ASes away.
- Google might not send you to the same cache for IPv6 and IPv4
 - Some customers complain about some YouTube videos working only on IPv4 or only on IPv6
- A few connections from subcontractors block IPv6 multicast which in turn hinders neighbor discovery (ND)



ACHIEVEMENTS FROM AS3308 PILOT BY 2017-03-10


- APNIC Claims for AS3308
 - 80% of IPv6 customers in Denmark
 - Close to 50% of users is IPv6 activated
 - Questionable numbers, APNIC can't tell how many users are behind NATed IPv4 solutions
- Downstream traffic of IPv6 enabled customers show a 29,5% IPv6 share

IPv6 Deployment for AS3308: TELIANET-DENMARK TeliaSonera AB

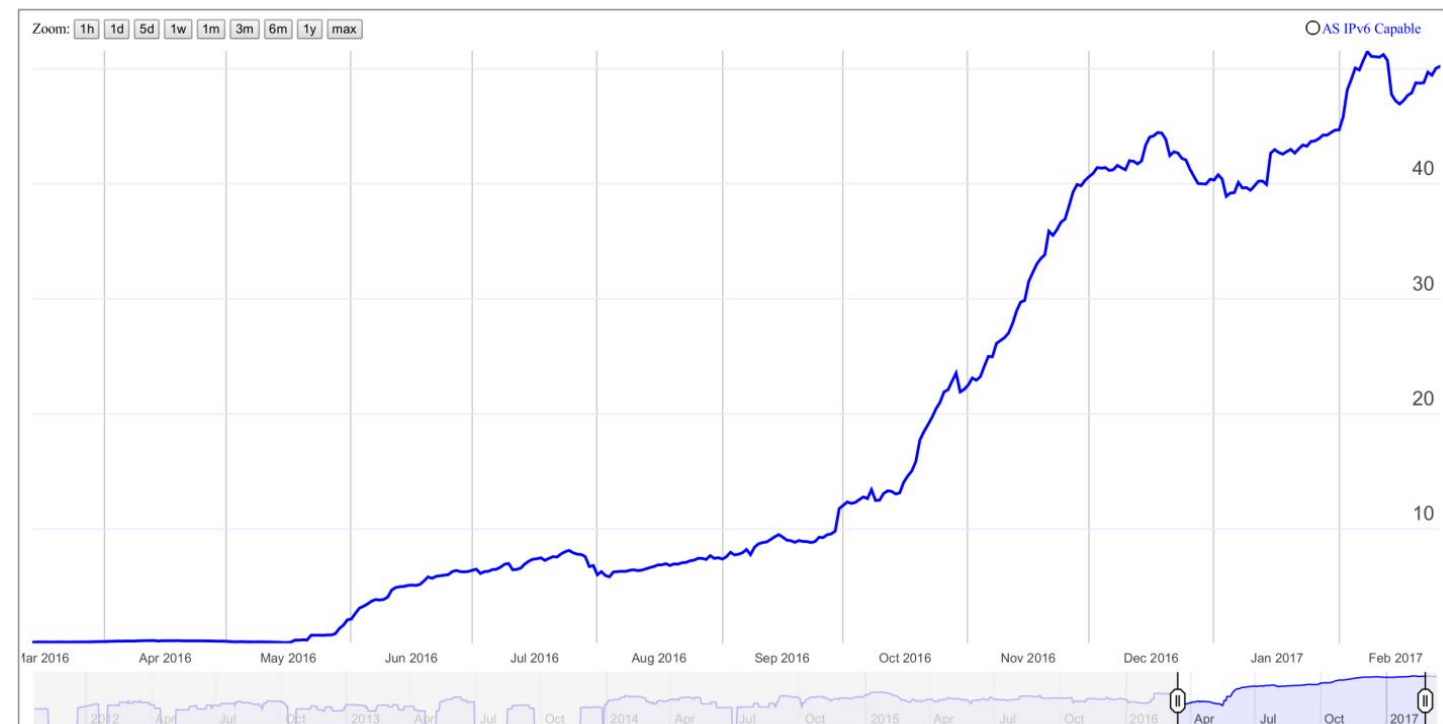

CONCLUSION

- Just do it
- We work within Telia Company to continue in Finland and Sweden

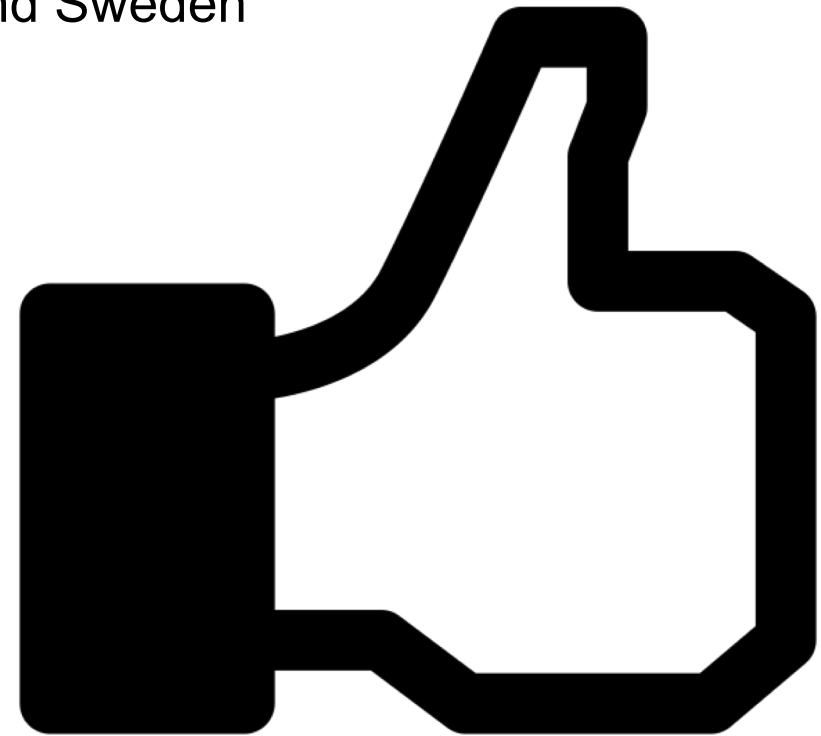

QUESTIONS

